## HF115F-LS

## MINIATURE HIGH POWER LATCHING RELAY



File No.:E134517



File No.:116934



File No.:CQC14002104529



## Features

- Latching relay
- Special contact struction
- Incandescent lamp load: 3500W 277VAC
- 5kV dielectric strength (between coil and contacts)
- Creepage distance: 11mm Low height: 15.7 mm
- Meeting reinforce insulation
- Product in accordance to EN60669-1 available
- Product in accordance to IEC 60335-1 available
- Plastic sealed and flux proofed types available
- UL insulation system: Class F
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (29.0 x 12.7 x 15.7) mm

#### **CONTACT DATA**

Contact arrangement	
Contact resistance	100mΩ max.(at 1A 6VDC)
Contact material	W+AgSnO <sub>2</sub>
	Resistive: 16A 250VAC
Contact rating	Incandescent Lamp: 3500W 277VAC
	Inrush current: 165A / 20ms
	flourescent: 800A/200µs
Max. switching voltage	440VAC
Max. switching current	16A
Max. switching power	4000VA
Mechanical endurance	2 x 10 <sup>6</sup> ops
	1.2 x 10 <sup>4</sup> ops (3500W 277VAC,
Electrical endurance	Tungsten lamp, at 40°C, 1s on 59s off)
	6 x 10 <sup>3</sup> ops(16A 250VAC,
	Resistive load, at 85°C, 5s on 5s off)

## **CHARACTERISTICS**

Insulation resistance			1000MΩ (at 500VDC)		
Dielectric	Betwee	n coil & contacts	5000VAC 1min		
strength	Betwee	n open contacts	1250VAC 1min		
Surge voltage (between coil & contacts)			10kV (1.2 / 50μs)		
Set time (at nomi. volt.)			10ms max.		
Reset time (at nomi. volt.)			10ms max.		
Temperature rise (at nomi. volt.)			55K max.		
		Functional	98m/s²		
Shock resistance*	Destructive	980m/s²			
Vibration resistance *			10Hz to 150Hz 10g		
Humidity			5% to 85% RH		
Ambient temperature			-40°C to 85°C		
Termination			PCB		
Unit weight			Approx. 13.5g		
Construction			Plastic sealed, Flux proofed		

Notes:1) This contact resistance value is tested under the norminal

- 2) \* Index is not that of relay length direction.
- 3) The data shown above are initial values.
- 4) UL insulation system: Class F.

## COIL

Coil power	1 coil latching: Approx. 400mW
	2 coils latching: Approx. 600mW

## **COIL DATA**

at 23°C

1	coil	la	tching
ī	:	_1	Sat

r con latering						
Nominal Voltage	oltage VDC				Max. Voltage VDC	_
VDC	max.	Typical	Min.	max.	VDC	Ω
5	3.5	≥50	30	3.5	6	62x (1±10%)
6	4.2	≥50	30	4.2	7.2	90x (1±10%)
9	6.3	≥50	30	6.3	10.8	202x (1±10%)
12	8.4	≥50	30	8.4	14.4	360x (1±10%)
24	16.8	≥50	30	16.8	28.8	1440x (1±10%)

#### 2 coils latching

nal ge	Set Voltage	Itage (ms)		Voltage	Max. Voltage	Coil Resistance
,	Max.	Typical	Min.	max.	VDC	x (1±10%)Ω
	3.5	≥50	30	3.5	7.5	42x (1±10%)
	4.2	≥50	30	4.2	9	55x (1±10%)
	6.3	≥50	30	6.3	13.5	135x (1±10%)
	8.4	≥50	30	8.4	18	240x (1±10%)
	16.8	≥50	30	16.8	36	886x (1±10%)
	je	Voltage VDC max. 3.5 4.2 6.3 8.4	Voltage VDC max. Typical  3.5 ≥50  4.2 ≥50  6.3 ≥50  8.4 ≥50	Voltage VDC max. Typical Min.  3.5 ≥50 30  4.2 ≥50 30  6.3 ≥50 30  8.4 ≥50 30	Voltage VDC max. Typical Min. Woltage VDC max.  3.5 ≥50 30 3.5  4.2 ≥50 30 4.2  6.3 ≥50 30 6.3  8.4 ≥50 30 8.4	Voltage   Voltage   VDC   Typical   Min.   Min.   Voltage   VDC   Max.   Voltage   VDC   VDC   Max.   Voltage   VDC   VDC   Max.   Voltage   VDC   VDC   Max.   Voltage   VDC   V

## **SAFETY APPROVAL RATINGS**

UL/CUL	16A 250VAC General use at 85°C
	Standard ballast 5A 277VAC at 40°C
	Electronic ballast 16A 120VAC at 40°C
	Electronic ballast 16A 277VAC at 40°C
	3500W 277VAC Tungsten Lamp at 40°C
VDE	16A 250VAC Resistive at 85°C
	EN60669:
	16A 250VAC COSØ =0.6
	16A 250VAC 140μF
	16A 250VAC COSØ =0.6 16A 250VAC 140μF

Notes: 1) All values unspecified are at room temperature.


2) Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2017 Rev. 1.00

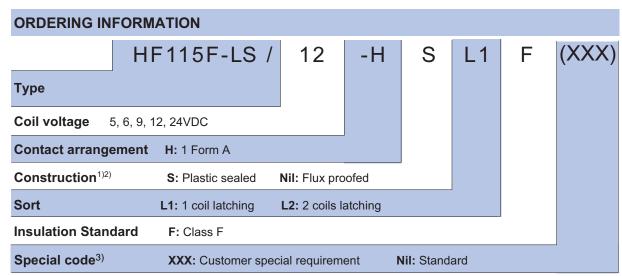

Notes: 1) We recommend flux proofed types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.).


We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.).


- Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
- 3) The customer special requirement express as special code after evaluating by Hongfa. e.g. (335) stands for product in accordance to IEC 60335-1 (GWT).

## **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**

Unit: mm









## Wiring Diagram (Bottom view)




1 coil latching

1 coil latching(Reset Status)






# PCB Layout (Bottom view)



2 coils latching



Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.

- 2) The tolerance without indicating for PCB layout is always ±0.1mm.
- 3) The width of the gridding is 2.52mm.

## **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**

Unit: mm

#### Notice

- 1. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
- 2. In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
- 3. Keep the product away from strong magnetic field during transportation, storage and application, to avoid change of set/reset voltage.

#### Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.