


# Plug-in sockets and accessories



## GZM4

For R4N, T-R4


Screw terminals  
Max. tightening moment for the terminal: 0,7 Nm  
35 mm rail mount acc. to EN 60715 or on panel mounting 75 x 27 x 61(82) mm ②  
Four poles  
6 A, 300 V AC



### Connection diagram



### Dimensions

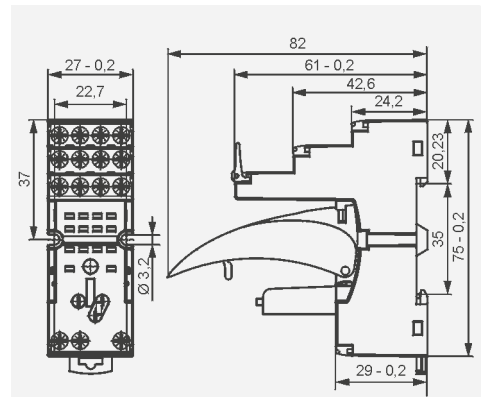

### Accessories ① ⑥

GZT4-0035 Module type M...

## GZMB4




For R4N, T-R4

Spring terminals  
Max. cross section of the cables: 1 x 0,2...1,5 mm<sup>2</sup> (1 x 24...16 AWG)  
Stripping length: 9...11 mm


35 mm rail mount acc. to EN 60715  
95 x 31 x 42,5(80) mm ②  
Four poles  
10 A, 300 V AC




### Connection diagram

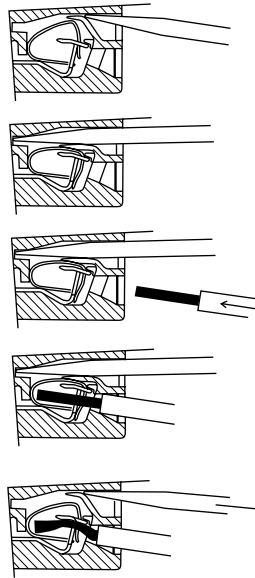


### Dimensions

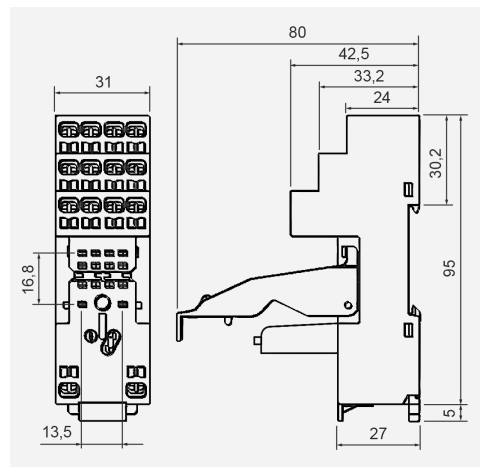

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".



### Accessories ① ⑥

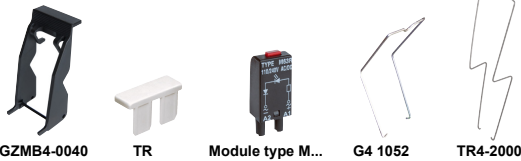


### Wire connection


## GZ4

For R4N


Screw terminals  
Max. tightening moment for the terminal: 0,7 Nm  
35 mm rail mount acc. to EN 60715 or on panel mounting 66,4 x 29,5 x 29 mm  
Four poles  
10 A, 300 V AC



### Connection diagram



### Dimensions

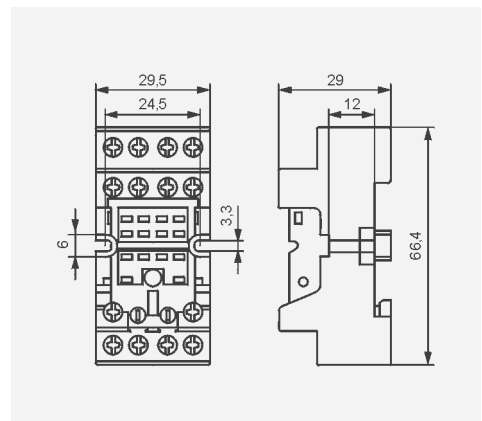

### Accessories

G4 1052

① Mounting and sub-assemblies of accessories in the socket - see page 16. Signalling / protecting modules type M... - see page 17. ② In the bracket the height of socket with retainer / retractor clip is shown. ⑥ For R4N relays: G4 1052, GZT4-0040, GZMB-0040, GZT4-0035, TR, module type M...; for T-R4 relays: TR4-2000, GZT4-0035, TR.