

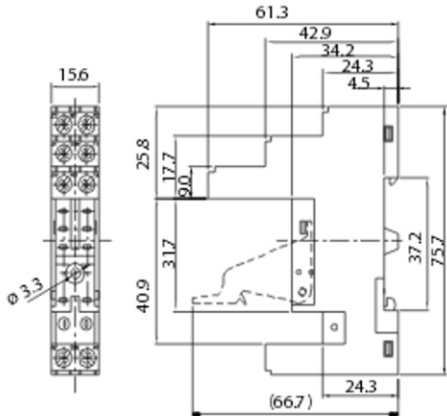




www.shc-gmbh.com

Sockets – PCB relays for DIN-rail

series	description	technical data	dimensions of the modules
<p>PI-50BE/3-R</p> 	<ul style="list-style-type: none"> • socket with screw terminals • 8-pole for 1- and 2-pole PCB relays • pinning: 5 mm • safe insulation coil/contact • packaging: 20 pieces <p>connection:</p> 	<ul style="list-style-type: none"> • rated voltage 300VAC • rated current 12A • dielectric strength >2.500Veff • ambient temperature -25..+70°C • terminal screw torque 0,7 Nm • protection category IP 20 <p>wire cross section:</p> <ul style="list-style-type: none"> • single wire 2 x 2,5 mm² • fine wire 2 x 2,5 mm² • wire end sleeve 2 x 1,5 mm² • wire strip length 7 mm 	

Approvals:   | All sockets including nameplate