

IGBT BASED DC SOLID STATE RELAY

- ▶ Latest IGBT technology generation.
- ▶ Ultra low drop out voltage at on-state (low power losses).
- ▶ Built-in protection against overvoltage and fast transients bursts.
- ▶ Built-in protection against overload and shorts-circuits of the load.
- ▶ Built-in over-temperature protection.
- ▶ Pluggable control connector with spring terminals

SDI0501700

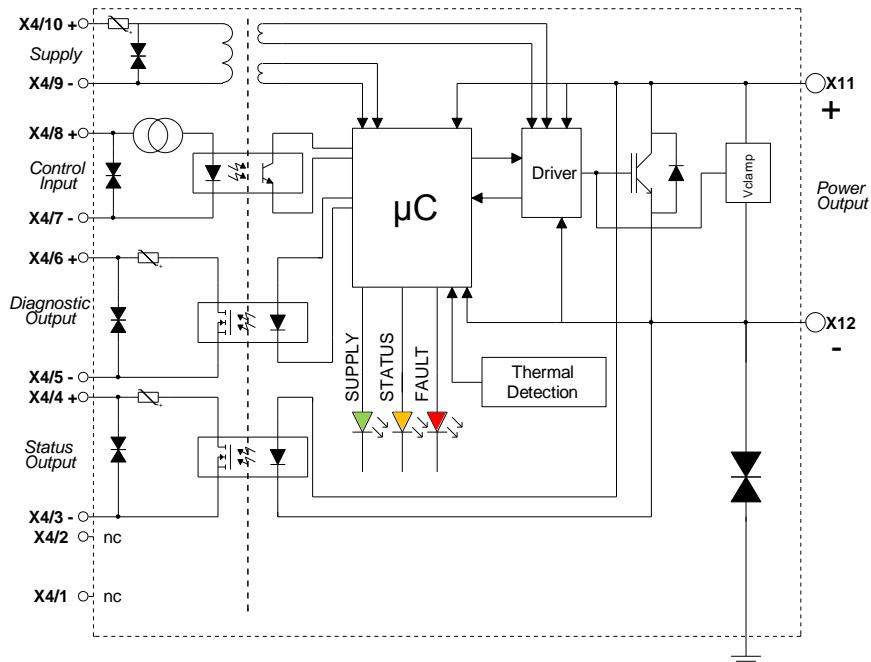


Nominal Control voltage	24&48VDC
Nominal output voltage	750VDC
Nom. load current with heatsink	50ADC

Load voltage range	Load current range	Control input voltage	Supply voltage range	Visualizations	Dimensions (WxHxD)	Weight
12 to 940VDC	0 à 50A (with heatsink)	24-48VDC	24-48VDC	3 LEDs : -SUPPLY (Green) -STATUS (Orange) -FAULT (Red)	157 x 68 x 83 (mm)	1050g

Fig. 1

INTERNAL DIAGRAM



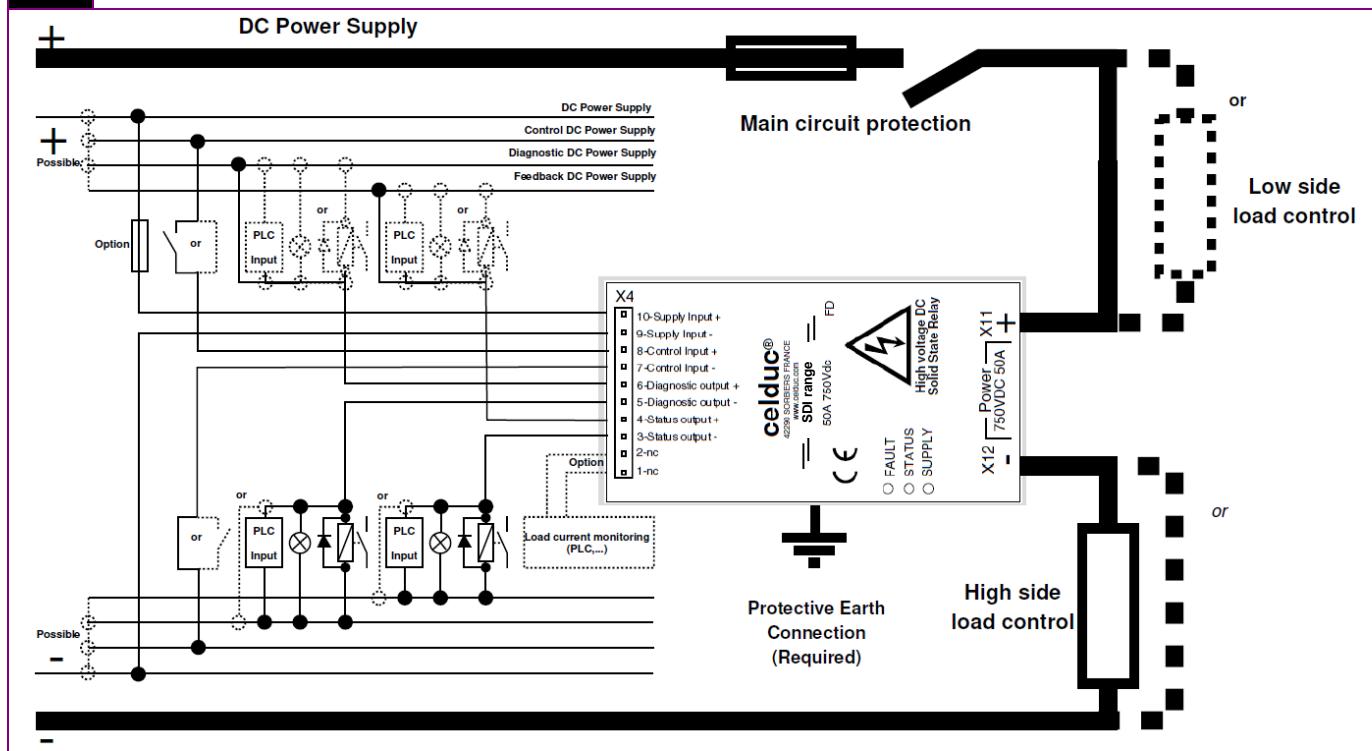
Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

celduc®
re l a i s

Fig. 2

EXAMPLES OF WIRING DIAGRAM



SUPPLY INPUT

SUPPLY CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Marking		X4/1 & X4/2	
	Nom. supply voltage	Us	24 & 48Vdc	
	Min. supply voltage	Us min	16.8Vdc	
	Max. supply voltage	Us max	60Vdc	
	Max. peak voltage	Usp	67.2Vdc	@pulse<1s
	Typ. operating current	Is	<100mA	
	Max. reverse current	-Is	<1µA	
	Overvoltage protection		Transient voltage suppressor	
	Internal Overcurrent and shorts-circuits protection		Thermistor	
	Reverse polarity protection		YES	
	Under Voltage Lockout protection UVLO		YES	

Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

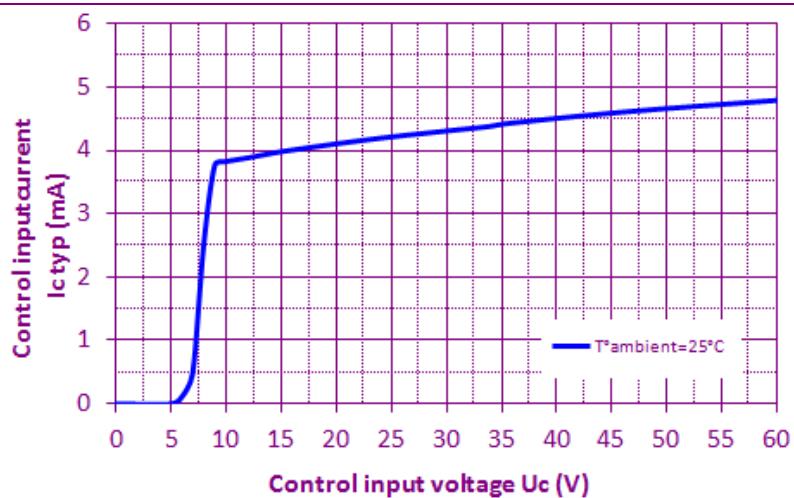
celduc®
relais

CONTROL INPUT

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Marking		X4/3 & X4/4	
	Control voltage range	Uc	24 & 48Vdc	
	Current consumption	Ic	<5mA	See fig. 3
	Max. reverse current	-Ic	<1µA	
	Min. switch-on voltage	Uc_on_min	14.4V	
	Min. releasing voltage	Uc_off_min	4Vdc	
	Max. input voltage	Ucmax	60Vdc	
	Max. reverse voltage	-Ucmax	60Vdc	
	Input impedance	Re	Current limitation	

Fig. 3

CONTROL INPUT CHARACTERISTICS



Proud to serve you

Data given at $T_{\text{ambient}}=40^{\circ}\text{C}$ and subject to modification without previous notice

POWER OUTPUT

CHARACTERISTIC	LABEL	VALUE	INFO.
Nom. power voltage	Ue	750Vdc	
Min. power voltage	Uemin	12Vdc	
Max permanent voltage	Umax1	940Vdc	
Non-permanent voltage	Umax2	1000Vdc	@pulse<5min
Repetitive peak voltage	Umax3	1270V	@pulse<20ms
Max. nominal currents	Ice	50A	See fig. 4 Values with heatsink
Min. nominal currents	Ice min	0.1A ^{(*)1}	
Non-repetitive IGBT peak overload current	Icepeak	300A	See fig. 8
Max. leakage current	Icelk	15µA	
On-state voltage	VCEsat	1.08V	See fig. 5 @Ie=50A
Reverse voltage (internal diode)	-Ut	1.12V	See fig. 6 @Ie=50A Tj=125°C
Max. inductive load (load + line length)		5mH	@Ie=50A
Overvoltage protection		Activ Clamp Protection	
Shorts-circuits/Overload protection		Automatic Desaturation detection	
Nominal desaturation current detection	Ice desat	225A	@Tj=25°C
Min Desaturation detection time		7µs	
Max. single pulse avalanche energy	Eep	20J	@tpulse=1ms
Max. repetitive pulse avalanche energy	Eep	5J	@Ie=50A
Typ. output capacitance	Cout	1.65nf	@Uc=0
IGBT junction/case thermal resistance	Rthjc	0.054K/W	See fig. 7
Reverse diode junction/case thermal resistance	Rthje	0.11K/W	See fig. 7
Built-in heatsink thermal resistance vertically mounted	Rthra	2.4K/W	@ΔTra=65°C
Heatsink thermal time constant	Tthra	30min	@ΔTra=65°C
Maximum junction temperature	Tjmax	105°C	@Ie=50A
Storage temperature	Tstg	-40->+85°C	
Operating temperature	Tamb	-40->+70°C	
Ambient humidity	Hr	5 à 95%	

(*)1

To have a good diagnostic operation, we recommend a minimum load current of 2Amps.

Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

celduc®
relais

Fig. 4

POWER DISSIPATION AND LOAD CURRENT LIMIT VS TEMPERATURE

Please refere to the installation notice for
precautions about mounting the device on a heatsink.

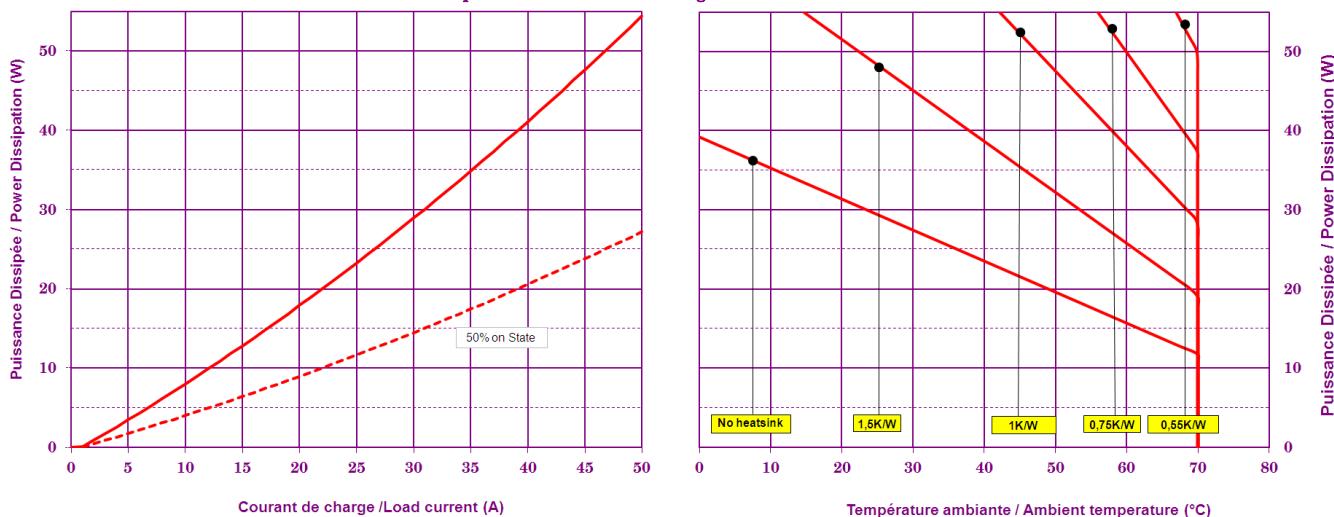


Fig. 5

IGBT DROP OUT VOLTAGE

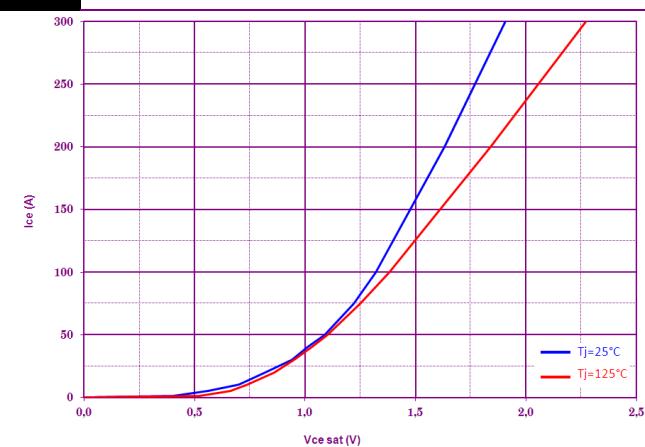


Fig. 6

REVERSE DIODE DROP OUT VOLTAGE

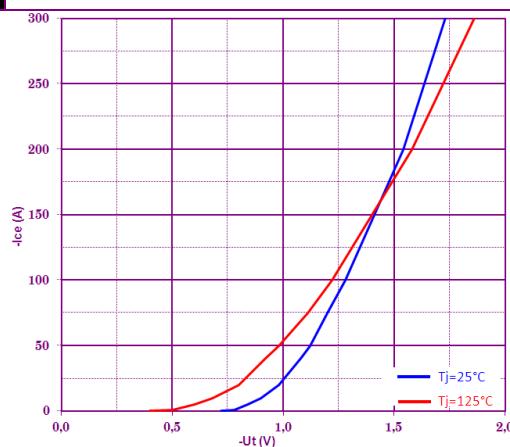


Fig. 7

POWER ELEMENT TRANSIENT THERMAL IMPEDANCE vs. PULSE DURATION

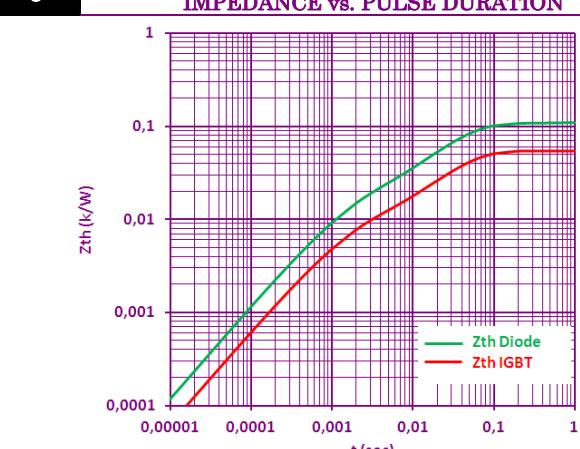
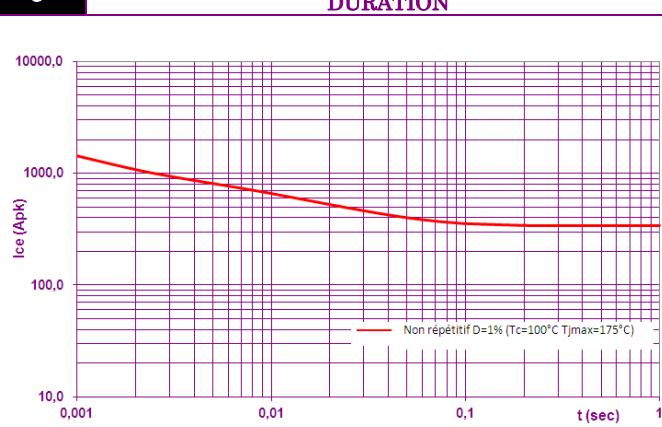


Fig. 8

ON-STATE PEAK OVERLOAD CURRENT vs. PULSE DURATION



Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

DIAGNOSTIC & STATUS OUTPUTS

DIAGNOSTIC & STATUS OUTPUTS	CHARACTERISTIC	LABEL	VALUE	INFO.
	Marking		X4/5 & X4/6 (Diagnostic Output) X4/3 & X4/4 (Status Output)	
	Type of contact		Semiconductor (Photo-MOS) NO Contact ("Opened" without activation or supply)	
	Nominal switching voltage		24 & 48Vdc	
	Max. switching voltage		60Vdc	
	Min. switching voltage		16.8Vdc	
	Max. switching current		50mA	
	Min. switching current		0.1mA	
	Max. on-state resistance	Rds_on	35Ω	
	Overvoltage protection		Transient voltage suppressor	
Overload and shorts-circuits protection			Thermistor	
Reverse polarity protection			YES	

SUPPLY INPUT	CONTROL INPUT	MAIN VOLTAGE	LOAD CIRCUIT	RELAYS BASEPLATE TEMPERATURE	SUPPLY LED	STATUS LED	FAULT LED	DIAGNOSTIC OUTPUT	STATUS OUTPUT
0	x	x	x	x	○	○	○	Open	Open
UVLO	x	x	x	x	●	○	○	Open	Open
1	0	YES	OK	<90°C	●	○	○	Open	Open
1	1	YES	OK	<90°C	●	●	○	Open	Closed
1	0	NO	OK	<90°C	●	○	●	Closed	Open
1	1	NO	OK	<90°C	●	●	●	Closed	Closed
1	0	YES	BREAKING	<90°C	●	●	●	Closed	Open
1	1	YES	BREAKING	<90°C	●	●	●	Closed	Closed
1	1	YES	OVERLOAD ^(*)	<90°C	●	○	●	Closed	Open
1	1	YES	SHORT-CIRCUIT ^(*)	<90°C	●	○	●	Closed	Open
1	0	x	#0A	x	●	●	●	Closed	Closed
1	x	x	x	>90°C	●	○	●	Open	Closed

LEGEND:

-  Flashing ton=0,1s toff=0,1s
-  Flashing ton=0,1s toff=2s
-  Flashing ton=1s toff=1s
-  Flashing ton=0,1s toff=0,1s

(*2) After four Short-circuits and/or overload detection, the relay will be block for safety, this mode is indicated by a flashing chasing of leds, in this case the diagnostic output would be closed and the Status output would be open, to cancel this fault, you should reset the product with supply input (pin X4/1+ et X4/2-).

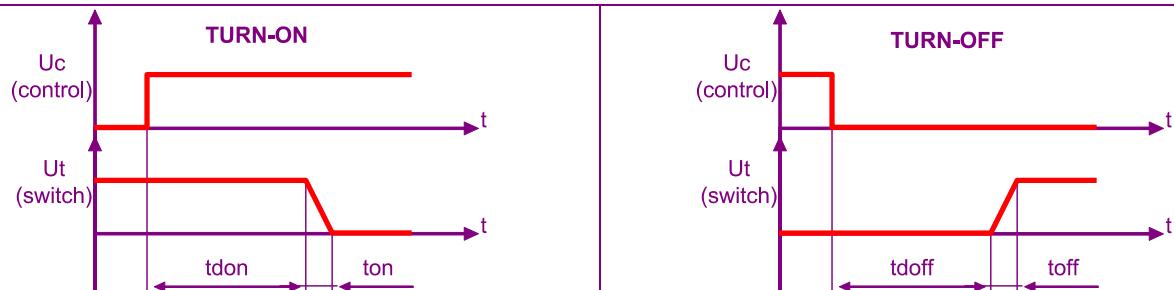
Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

celduc®
relais

TIME CHARACTERISTICS

Fig. 2

TIME DIAGRAMS

TIME CHARACT.	CHARACTERISTIC	LABEL	VALUE	INFO.
	Turn on time	t_{on}	1ms	$R_{load}=20\Omega$ $L_{load}=5mH$ $U_e=750Vdc$
	Turn on delay	t_{don}	1.5ms	
	Turn off time	t_{off}	300μs	$R_{load}=20\Omega$ $L_{load}=5mH$ $U_e=750Vdc$
	Turn off delay	t_{doff}	1.5ms	
	Max. On-Off frequency	$F_{(on-off)}$	1Hz	

GENERAL INFORMATION

WIRING	Connections		Power	Control	
	Type		M6 Hexagonal screw	Cage spring with manual lever plug	
	Tightening torque		3.75Nm	By pushing with DIN 5264 Screwdriver 0.4x2.5	
	Recommended wiring type		round tabs, eyelet type, M6	1x1.5mm ² max	
	Plastic material housing		WELLAMID 6600 PA66 HWV0CP		
	Mounting		4 screws M5		See mounting sheet
	Noise level		No audible noise		
	Weight		1050g		

Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

celduc®
relais

STANDARDS

GENERAL	Standards	EN50155	
	Temperature class	TX	
	Protection level	IP00	
	CE marking	Yes	
	UL, cULUS and VDE approvals	Possible on request	
	Reliability	MTTF = 118 years MTTFd ≥ 24 years	ISO13849-1 @40°C/750Vdc and 50A

INSULATION	Standards	EN50124-1	
	Overvoltage categories	OV4	
	Pollution Degree	PD2	
	Rated impulse voltage between Input and Power outputs	Uni	8kV
	Rated insulation voltage between Input and Power outputs	Unm	0.9kV
	Rated impulse voltage between different signals of X4 connector (supply, control input, Diagnostic output and Status output)		2.5kV
	Rated impulse voltage between Power output and ground (Aluminum baseplate)		4kV ^{(*)3}

(*)3 Warning: The rated impulse voltage test can damage the reliability of some components, we invite you to do this insulation test with reduced voltages (1500Vpk).

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	RESULTS	TESTS STANDARD
	E.S.D. (Electrostatic discharges)	EN50121-3-2	PASS	EN61000-4-2
	Radiated electromagnetic fields	EN50121-3-2	PASS	EN61000-4-3
	Fast transients bursts	EN50121-3-2	PASS	EN61000-4-4
	Electric chocks	EN50121-3-2	PASS	EN61000-4-5
	Radio-frequency fields	EN50121-3-2	PASS	EN61000-4-6

E.M.C. EMISSION	Radiated and conducted disturbances	EN50121-3-2	PASS	EN55011

OTHERS	Fire & smoke protection	EN45545-2	HL2 with requirement R22	
	Mechanical test Shocks and Vibrations	EN61373	PASS	

Proud to serve you

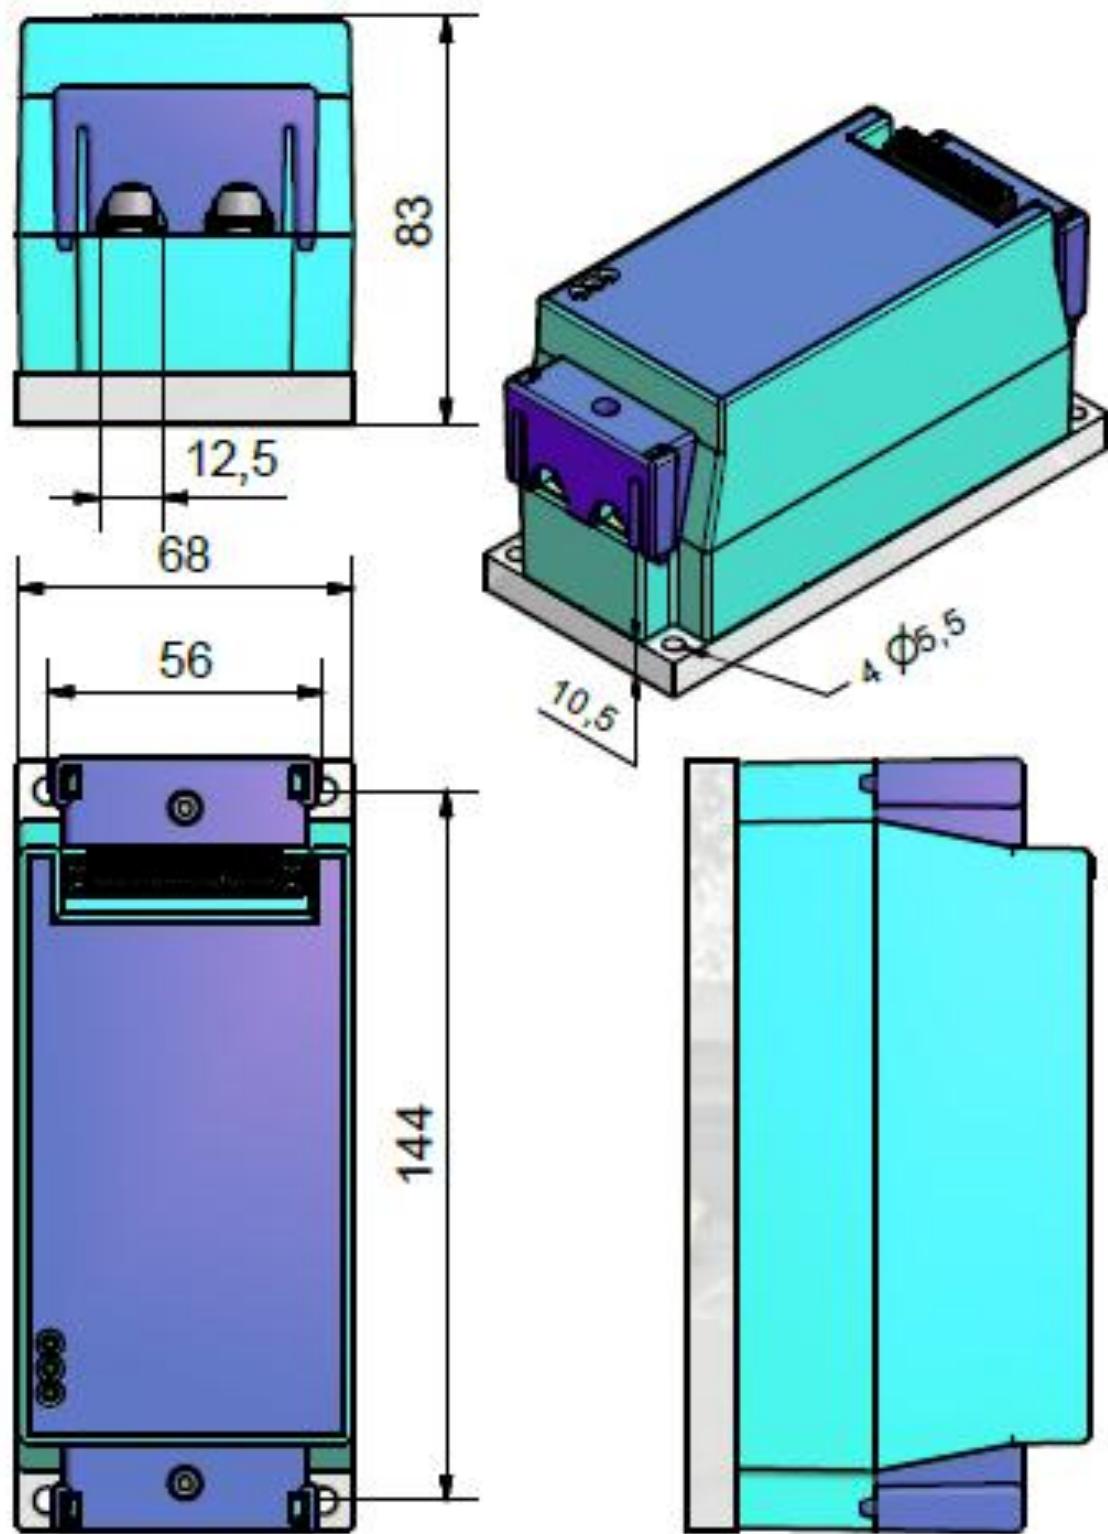
Data given at Tambient=40°C and subject to modification without previous notice

celduc®
relais

DIMENSIONS

Fig. 8

DIMENSIONS (in mm)

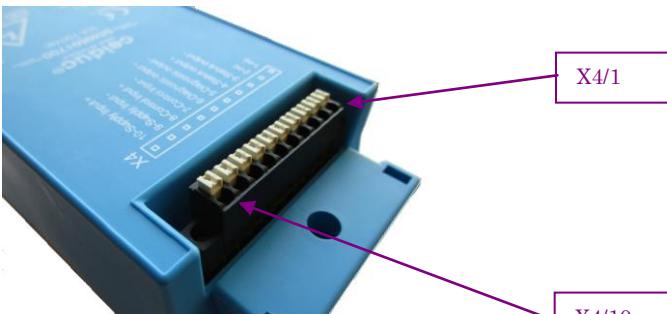
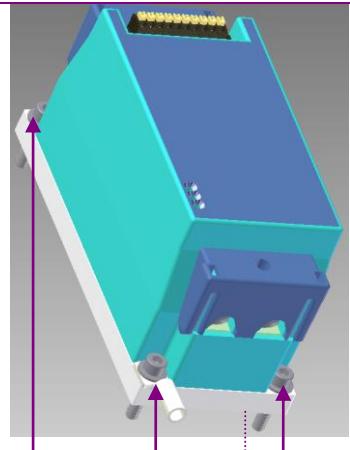


Proud to serve you

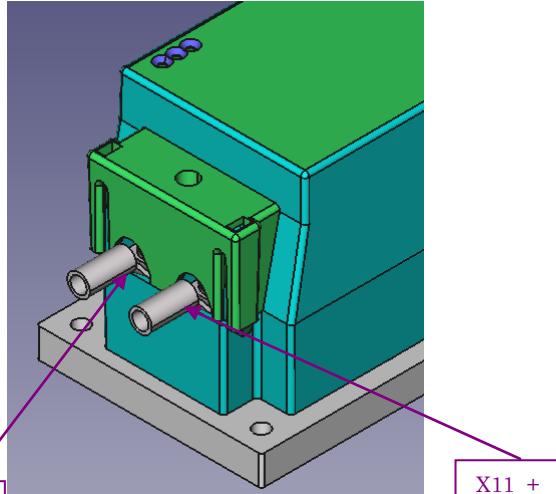
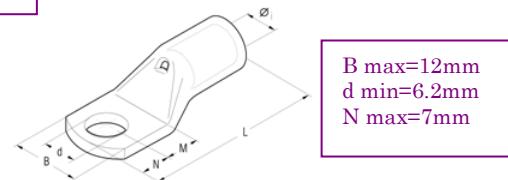
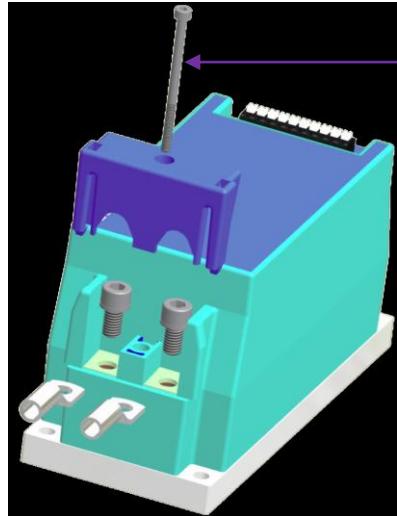
Data given at Tambient=40°C and subject to modification without previous notice

celduc®
relais

CONNECTIONS-WIRING

CONTROL CONNECTOR	GROUND WIRING
 <p>X4/10</p> <p>==>Spring connector « PUSH IN »</p>  <p>3.81</p> <p>1.5 mm²</p> <p>180°</p>	 <p>Ground symbol</p> <p>The Ground-wiring of the product with the rest of installation is made by screwing directly to the relay baseplate with one of the 4 holes (M5). Fastening screws and round terminals (power, ground...) are not supplied with the product.</p>

POWER WIRING


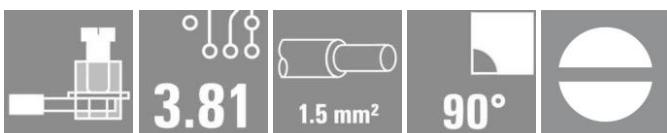
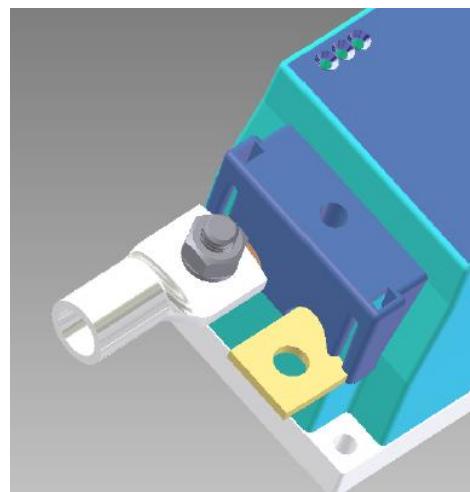

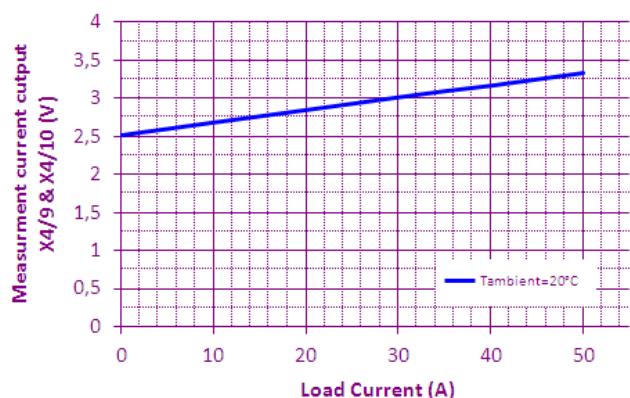
 <p>X12 -</p> <p>X11 +</p>  <p>B max=12mm d min=6.2mm N max=7mm</p>	 <p>Locking of plastic covers by screws CHC M3 Maximum tightening torque: 1.0Nm</p>
---	---

Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

celduc®

relais

OPTIONSControl connector with screws :Connection kit for large cable ends :Possibility of current measurement output (isolated) on signal connector (pin X4/9 and X4/10):

Please consult our website for other accessory references
(Heatsink, mounting adaptors, thermal grease...).